

PulseJetter Drain Cleaner

PJ-600

The PJ-600 Drain Cleaner is **compact and rugged** entry-level drain cleaner. It can be stored in a small utility closet and easily carried to the work area. It is designed for clearing blockages in pipes 1¼"-2" I.D. The unit uses a pulsating action to help it navigate around bends and blast through blockages. It comes equipped with three nozzles (one blind thrust, one penetrating and one cornering).

Features – Benefits

- Pulsating action – Allows navigation around tight bends*
- Polypropylene housing – Will not corrode*
- Compact – Ideal for use in tight areas*
- GFCI circuit – Protects operator*
- Polyester reinforced hose – Rugged*
- Three nozzles – Matches application*

600 PSI at 1 GPM



Pulsating Bursts of High Pressure Water for Additional Cleaning Power.



Specifications

- Motor Power:** 1.3 HP
- Input Power:** 8 amps, 115 V, 60 Hz AC
- Output Water Pressure:** 600 PSI at 1 GPM
- Pump:** Three piston axial
- Dimensions:** 12" high x 7" wide x 14½" deep
- Weight:** 30 lbs net dry

PJ-600-60 PulseJetter Drain Cleaner, 1½ HP, 115 V, 60 Hz, including, ¼" x 25' high pressure hose, three jetter nozzles and built-in nozzle rack

Optional:
TE30-HOSE PulseJetter Hose ¾" x 30'

PJ-7004 Drop Head Nozzle for ¼" hose

7060 Hose 15' to connect PulseJetter to standard faucet


Note: Call for additional accessories.

Heavy-Duty PulseJetter Drain Cleaner

PJ-1400

The PJ-1400 Drain Cleaner is ideal for use in sink, shower, laundry tub and floor drains, and processing lines. This **powerful** unit comes equipped with three nozzles (one blind thrust, one penetrating and one cornering) to remove grease, hair, sand, food, soap buildup and other debris in pipes 1½"-4" I.D. It features a 1½ HP thermal protected motor and a triplex pump to deliver 1,400 PSI of cleaning force at 1.7 GPM. Accessories are available to also use this unit as a pressure washer.

1,400 PSI at 1.7 GPM

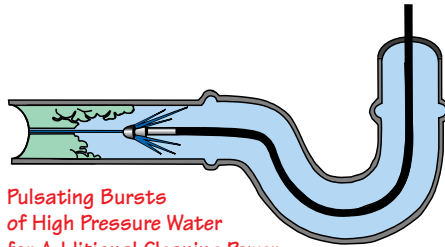

Pulsating Bursts of High Pressure Water for Additional Cleaning Power.

Features – Benefits

Pressure regulator – Adjust the PSI to fit the application

Pulse control – Allows navigation around tight bends

Heavy-duty construction – Long life

Integrated dolly – Easy to move

GFCI circuit – Protects operator

Polyester reinforced hose – Rugged

Rugged hose reel – Neatly store your high pressure hose

Three nozzles – Matches application

Locking casters – Prevents rolling

Three-Year Limited Warranty



Specifications

Motor Power: 1½ HP
Input Power: 15 amps, 115 V, 60 Hz AC
 (Optional: 15 amps, 115 V, 50 Hz; 7.5 amps, 230 V, 60 Hz; or 7.5 amps, 230 V, 50 Hz)
Output Water Pressure: 1,400 PSI at 1.7 GPM
Pump: Triplex ceramic plunger running in oil bath
Dimensions: 40" high x 14" wide x 21" deep
Weight: 95 lbs net dry

PJ-1400-60 Heavy-Duty PulseJetter Drain Cleaner, 1½ HP, 115 V, 60 Hz, including cart, reel, ¾" x 60' high pressure hose, three jetter nozzles and built-in nozzle rack

Optional:
TE-50-HOSE-1/8 PulseJetter Hose ½" x 50'

PJ-PW-KIT Pressure Washer Conversion Kit including wand, variable spray nozzle and 25' high pressure hose to convert PJ-1400 into a 1,400 PSI Pressure Washer



For primary use as a pressure washer see page 92.

Note: Call for additional accessories.

For Sales Call: +1-203-359-4708
Fax: +1-203-359-9601


DRAIN LINE MAINTENANCE

Heavy-Duty PulseJetter Drain Cleaner

PJ-1400

The PJ-1400 Drain Cleaner is ideal for use in sink, shower, laundry tub and floor drains, and processing lines. This **powerful** unit comes equipped with three nozzles (one blind thrust, one penetrating and one cornering) to remove grease, hair, sand, food, soap buildup and other debris in pipes 1½"-4" I.D. It features a 1½ HP thermal protected motor and a triplex pump to deliver 1,400 PSI of cleaning force at 1.7 GPM. Accessories are available to also use this unit as a pressure washer.

1,400 PSI at 1.7 GPM

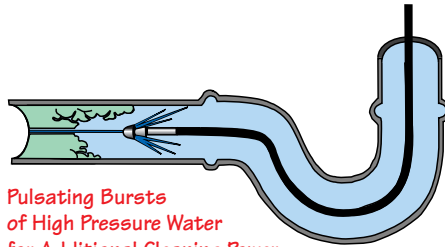

Pulsating Bursts of High Pressure Water for Additional Cleaning Power.

Features – Benefits

Pressure regulator – Adjust the PSI to fit the application

Pulse control – Allows navigation around tight bends

Heavy-duty construction – Long life

Integrated dolly – Easy to move

GFCI circuit – Protects operator


Polyester reinforced hose – Rugged

Rugged hose reel – Neatly store your high pressure hose

Three nozzles – Matches application

Locking casters – Prevents rolling

Three-Year Limited Warranty

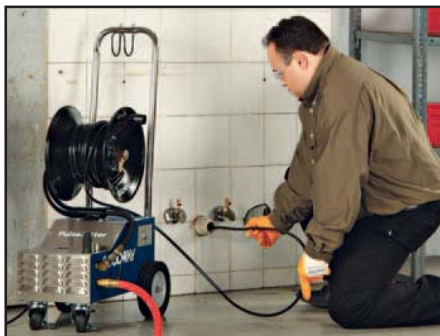

Specifications

Motor Power: 1½ HP
Input Power: 15 amps, 115 V, 60 Hz AC
 (Optional: 15 amps, 115 V, 50 Hz; 7.5 amps, 230 V, 60 Hz; or 7.5 amps, 230 V, 50 Hz)
Output Water Pressure: 1,400 PSI at 1.7 GPM
Pump: Triplex ceramic plunger running in oil bath
Dimensions: 40" high x 14" wide x 21" deep
Weight: 95 lbs net dry

PJ-1400-60 Heavy-Duty PulseJetter Drain Cleaner, 1½ HP, 115 V, 60 Hz, including cart, reel, ¾" x 60' high pressure hose, three jetter nozzles and built-in nozzle rack

Optional:
TE-50-HOSE-1/8 PulseJetter Hose 1/8" x 50'

PJ-PW-KIT Pressure Washer Conversion Kit including wand, variable spray nozzle and 25' high pressure hose to convert PJ-1400 into a 1,400 PSI Pressure Washer



For primary use as a pressure washer see page 92.

Note: Call for additional accessories.

For Sales Call: +1-203-359-4708
Fax: +1-203-359-9601

DRAIN LINE MAINTENANCE

Vapor-Steam Cleaners



Vapor-Steam Cleaner



Heavy-Duty Vapor-Steam Cleaner



Heavy-Duty Vapor-Steam Cleaner



Vapor-Steam Cleaner with Vacuum



Specifications	GVC-1500	GVC-4600	GVC-8000A	GVC-2200V
Input Power:	15 Amps, 115 V, 50/60 Hz AC, Maximum 1,500 W	20 Amps, 230 V, 50/60 Hz AC, Maximum 4,600 W	20 Amps, 230 V, 50/60 Hz AC, 3 Phase, Maximum 8,000 W	20 Amps, 115 V, 50/60 Hz AC, Maximum 2,200 W
Power Supply Cord:	14', 14-3	14', 12-3	12', 12-4	15', 12-3
Output Steam Pressure:	Adjustable, 0-90 PSI	Adjustable, 0-120 PSI	120 PSI	Adjustable, 0-90 PSI
Output Steam Temperature:	290°F	290°F	290°F	290°F
Hose:	10', with Pistol Grip	10', with Pistol Grip	10', with Pistol Grip	15', with Pistol Grip
Wand:	38" Two-Piece	38" Two-Piece	38" Two-Piece	37" Two-Piece
Boiler(s):	0.8 Gallons Stainless Steel	0.8 Gallons Stainless Steel	Two 1.2 Gallons Stainless Steel	1.3 Gallons Stainless Steel
Water Tank:	1.3 Gallons	1.3 Gallons	2.6 Gallons	1.3 Gallons
Chemical Injection:	Direct	Direct	Direct	Direct
Chemical Tank(s):	1.3 Gallons	Two 1.3 Gallons	Two 1.3 Gallons	1.3 Gallons
Special Features:	Continuous Steam Optional Gum Removal Kit	Continuous Steam •	Continuous Steam •	Continuous Steam Integrated 1½ HP Vacuum
Dimensions:	37" High x 12½" Wide x 21" Deep	37" High x 20" Wide x 39" Deep	39" High x 18" Wide x 40" Deep	38" High x 16" Wide x 24" Deep
Weight:	57 Lbs, Net Dry	55 Lbs, Net Dry	77 Lbs, Net Dry	81 Lbs, Net Dry
Accessories/Prices:	See Page 101	See Page 102	See Page 103	See Page 104



GVC-1500



GVC-4600



GVC-2200V

www.goodway.com

For Sales Call: +1-203-359-4708
Fax: +1-203-359-9601

Vapor-Steam Cleaner

GVC-1500

The GVC-1500 Vapor-Steam Cleaner heats tap water to 330°F, producing a dry vapor-steam with an adjustable pressure of 0-90 PSI and an output temperature of 290°F. When vapor-steam touches a cold surface it expands, **explosively loosening dirt, grease and grime**. Its high heat also kills bacteria, fungus, mold, mildew and other microorganisms on contact. While the adjustable pressure allows the operator to release sufficient vapor-steam to thoroughly clean any surface without reduced visibility, the unit's chemical-injection system provides for additional cleaning power. The unit comes with a full assortment of cleaning tools and accessories to cover a wide range of applications. It can also be configured with a separate accessories package for use as a gum removal machine (GVC-GUM).

Features – Benefits

- Stainless steel construction – Long life**
- In operation refillable water tank – Continuous steam**
- Stainless steel boiler – No depressurization needed after use**
- Adjustable vapor-steam pressure – Matches application**
- Chemical-injection – Additional cleaning power**
- Multiple cleaning tools – Ideal for flat surfaces, cracks and crevices**



0-90 PSI at 290°F

Specifications

Input Power:	15 amps, 115 V, 50/60 Hz AC, Maximum 1,500 W
Water Tank:	1.3 gallons
Chemical Tank:	1.3 gallons
Boiler:	0.8 gallons
Output Steam Pressure:	Adjustable, 0-90 PSI
Output Steam Temperature:	290°F
Dimensions:	37" high x 12½" wide x 21" deep
Weight:	57 lbs net dry

- **115 VOLTS**
- **CHEMICAL INJECTION**
- **CONTINUOUS STEAM**


IDEAL FOR GUM REMOVAL



1 Second

2 Seconds

3 Seconds

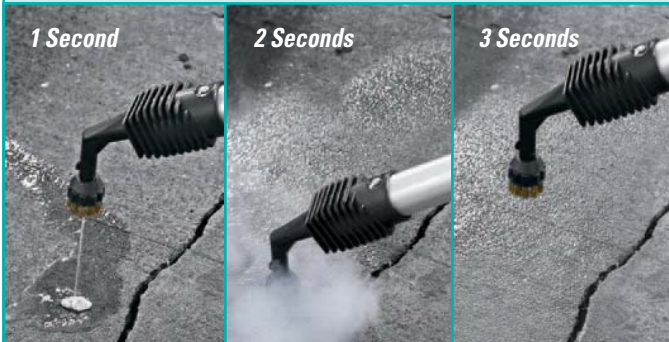

GVC-1500 Vapor-Steam Cleaner with 1,500 W boiler, 115 V, 60 Hz, including 10' hose with pistol grip, two-piece 38" wand, 11" floor brush, 5" triangular brush, 9" squeegee tool, 14" curved lance, 8" curved lance, 3" detail lance, 3" triangular brush, 2" round brush, three circular nylon scrubbing brushes, three circular brass scrubbing brushes, soap container and a 1 gallon bottle of cleaner (see page 79 for photo of accessories)

GVC-500-4 High Temperature Cleaner four 1 gallon bottles

GVC-GUM Vapor-Steam Gum Remover with 1,500 W boiler, 115 V, 60 Hz, including 10' hose with pistol grip, one-piece 46" wand, 3" detail lance, five circular brass scrubbing brushes, soap container and four 1 gallon bottles of gum removal concentrate

GRC-400-4 High Temperature Gum Removal Concentrate four 1 gallon bottles

Note: Call for additional accessories.

Heavy-Duty Vapor-Steam Cleaner

GVC-4600A

Ideal for commercial facilities, factories and industrial parks, the GVC-4600A is the **most powerful vapor-steam cleaner in its class**. It comes equipped with a 1.3 gallon water tank, two 1.3 gallon chemical tanks and a stainless steel boiler. The unit heats tap water to 324°F, producing a dry vapor-steam with an adjustable pressure of 0-120 PSI and an output temperature of 290°F. It features a wide range of accessories for virtually any application.

Features – Benefits

Stainless steel construction – Long life

In operation refillable water tank –

Continuous steam

Stainless steel boiler – No depressurization needed after use

Adjustable vapor-steam pressure –

Matches application

Chemical-injection – Additional cleaning power

Multiple cleaning tools – Ideal for flat surfaces, cracks and crevices



- **CHEMICAL INJECTION**
- **CONTINUOUS STEAM**

0-120 PSI at 290°F

Specifications

Input Power: 20 amps, 230 V, 50/60 Hz AC, Maximum 4,600 W

Output Steam Pressure: Adjustable, 0-120 PSI

Output Steam Temperature: 290°F

Water Tank: 1.3 gallons

Chemical Tanks: Two 1.3 gallons

Boiler: 0.8 gallons

Dimensions: 37" high x 20" wide x 39" deep

Weight: 55 lbs net dry



GVC-4600A Heavy-Duty Vapor-Steam Cleaner with 4,600 W boiler, 230 V, 50/60 Hz, including 10' hose with pistol grip, two-piece 38" wand, 11" floor brush, 5" triangular brush, 9" squeegee tool, 14" curved lance, 8" curved lance, 3" detail lance, 3" triangular brush, 2" round brush, three circular nylon scrubbing brushes, three circular brass scrubbing brushes, two soap containers and a 1 gallon bottle of cleaner – **call for price**

GVC-500-4 High Temperature Cleaner four 1 gallon bottles

Note: Call for additional accessories.

www.goodway.com

Heavy-Duty Vapor-Steam Cleaner

GVC-8000A-3

Compact, maneuverable and very powerful, the GVC-8000A-3 is a heavy-duty, industrial three phase Vapor-Steam Cleaner. Two stainless steel boilers heat tap water to 324°F, producing **56 gallons of dry vapor-steam per minute**, with a pressure of 120 PSI and an output temperature of 290°F. The unit comes equipped with a hose and vapor-steam gun, as well as a chemical-injection system for additional cleaning power.

Features – Benefits

Stainless steel construction – Long life

In operation refillable water tank –

Continuous steam

Two stainless steel boilers – No depressurization needed after use

Chemical-injection – Additional cleaning power

Multiple cleaning tools – Ideal for flat surfaces, cracks and crevices

- **CHEMICAL INJECTION**
- **CONTINUOUS STEAM**

120 PSI at 290°F

Specifications

Input Power: 20 amps, 230 V, 50/60 Hz AC, three phase, Maximum 8,000 W

Water Tank: 2.6 gallons

Chemical Tanks: Two 1.3 gallons

Boilers: Two 1.2 gallons

Output Steam Pressure: 120 PSI

Output Steam Temperature: 290°F

Dimensions: 39" high x 18" wide x 40" deep

Weight: 77 lbs net dry



GVC-8000A-3 Heavy-Duty Vapor-Steam Cleaner with two 4,000 W boilers, 230 V, 50/60 Hz, three phase, including 10' hose with pistol grip, two-piece 38" wand, 11" floor brush, 5" triangular brush, 9" squeegee tool, 14" curved lance, 8" curved lance, 3" detail lance, 3" triangular brush, 2" round brush, three circular nylon scrubbing brushes, three circular brass scrubbing brushes, two soap containers and a 1 gallon bottle of cleaner – **call for price**

GVC-500-4 High Temperature Cleaner four 1 gallon bottles

Note: Call for additional accessories.

For Sales Call: +1-203-359-4708
Fax: +1-203-359-9601

Vapor-Steam Cleaner with Vacuum

GVC-2200V

The GVC-2200V Vapor-Steam Cleaner **kills germs on contact**. It heats tap water to 330°F, producing a dry vapor-steam with an adjustable pressure of 0-90 PSI and an output temperature of 290°F. The unit comes equipped with a chemical-injection system for additional cleaning power, and features a built-in vacuum to recover loosened debris and liquids. Specially designed cleaning tools and accessories allow the cleaning of not only flat surfaces, but also of cracks and crevices where dirt and microorganism contamination would be difficult or even impossible to remove by any other method.

Features – Benefits

- Stainless steel construction – Long life**
- In operation refillable water tank – Continuous steam**
- Stainless steel boiler – No depressurization needed after use**
- Adjustable vapor-steam pressure – Matches application**
- Chemical-injection – Additional cleaning power**
- Built-in vacuum – Removal of loosened debris**
- Multiple cleaning tools – Ideal for flat surfaces, cracks and crevices**



- **115 VOLTS**
- **CHEMICAL INJECTION**
- **BUILT-IN VACUUM**
- **CONTINUOUS STEAM**

0-90 PSI at 290°F

Specifications

Vacuum Motor Power:	1 1/2 HP
Input Power:	20 amps, 115 V, 60 Hz AC, Maximum 2,200 W
Water Tank:	1.3 gallons
Chemical Tank:	1.3 gallons
Boiler:	1.3 gallons
Output Steam Pressure:	Adjustable, 0-90 PSI
Output Steam Temperature:	290°F
Dimensions:	38" high x 16" wide x 24" deep
Weight:	81 lbs net dry



GVC-2200V Vapor-Steam Cleaner with 2,200 W boiler and built-in 1 1/2 HP vacuum, 115 V, 60 Hz, including 15' hose with pistol grip, two-piece 37" wand, 16" floor tool with interchangeable bristles and squeegee strips, 9 1/2" surface tool, 10" squeegee tool, 6" tool with interchangeable bristles and squeegee strips, 4" upholstery and drapery tool, 3" utility tool, 18" curved lance, 4 1/2" detail lance, circular nylon scrubbing brush, circular brass scrubbing brush, soap container and a 1 gallon bottle of cleaner – **call for price**

GVC-500-4 High Temperature Cleaner four 1 gallon bottles

Note: Call for additional accessories.

www.goodway.com